NO TRANSFER NECESSARY
JOSEPH J. MITOCK
LORAIN COUNTY AUDITOR
DEPUTY
7/22/68

CENTERLINE SURVEY PLAT
LOR-301-9.44

730286
730286

LAGRANGE TOWNSHIP T-4N R-17W
CARLISLE TOWNSHIP T-5N R-17W
LORAIN COUNTY, OHIO

ADM. NO.	STATE	PROJECT	
2	OHIO		

LORAIN-301-9.44
Centerline Survey Plat

SCALE IN FEET
0 500 1000 2000 3000

LOCATION OF R/W MONUMENTS				
MON'S	REC'MD	℄ SURVEY STATION	LOCATION	REMARKS
		486+20.99	PC	
		500+87.72	PCC	
		501+58.55	PCC	
		503+85.28	PT	
		508+80.17	PC	
		510+86.90	PCC	
		511+16.86	PCC	
		513+43.59	PT	
		1618.36 Persons Rd	R/I	See Detail

Curve Data for Relocated SR 301

Curve Data					
PC	486+20.99	PCC	500+87.72	PCC	501+58.55
RI	489+34.37	RI	501+08.16	RI	504+82.13
RCC	500+87.72	RCC	501+58.55	PT	503+85.28
Δ	5°00 DT	Δ	1°-30 DT	Δ	8°00 DT
D	2.333934°	D	4°-00-00"	D	2.333934°
T	133.56	T	32.45	T	133.56
L	266.73	L	60.83'	L	266.73
R	1146	R	1145	R	1146
R	1910.08	R	1432.77	R	1910.08

Curve Data					
PC	508+80.17	PCC	510+86.90	PCC	511+16.86
RI	509+53.75	RI	511+01.07	RI	511+80.64
PCC	510+86.90	PCC	511+16.86	PT	513+43.59
Δ	5°00 LT	Δ	1°-30 LT	Δ	8°00 LT
D	2.333934°	D	4°-00-00"	D	2.333934°
T	133.56	T	32.45	T	133.56
L	266.73	L	60.83'	L	266.73
R	1146	R	1145	R	1146
R	1910.08	R	1432.40	R	1910.08

Note: Monument description as shown on Standard Construction Drawing BSC-1 (Rev. 10-1-67) of the Department of Highways, are to be placed after the Leveling Course and prior to placing the Surface Course on 404 Pavement.

The placing of the monuments, shall be under the direction of the Engineer and any alterations shall be noted and the Right of Way Department of Division #3 shall be notified of the new locations.

SYMBOL
⊕ Monument Assembly
QUANTITIES
⊕ Monument Assembly

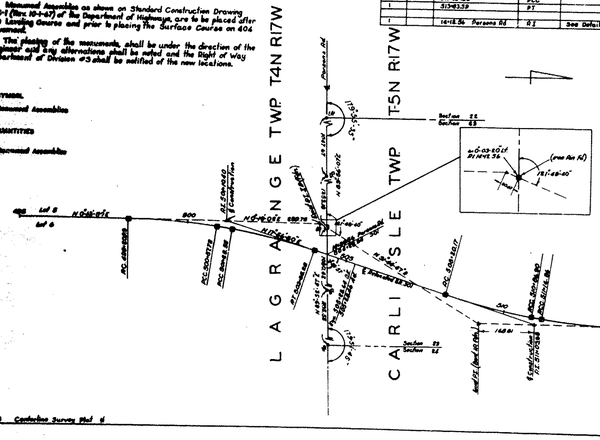
T5N R17W
T4N R17W
LAGRANGE TWP
CARLISLE TWP
N 68°-03'-02" E
(new Rte 14)
R/I=5°-00'
N 68°-03'-02" E 699.79
N 68°-03'-02" E 699.79
N 0°-48'-0" E
N 0°-48'-0" E
N 0°-48'-0" E