



- G. As directed by the Planning Commission, where a pedestrian walkway crosses a main drive or private road, pedestrian crossing signs shall be installed and the walkway shall be raised and paved in a manner which clearly distinguishes the walkway from the vehicle way.
- H. All sidewalks shall be a minimum 5 feet in width.

**Raised pedestrian crossing  
in drive area**

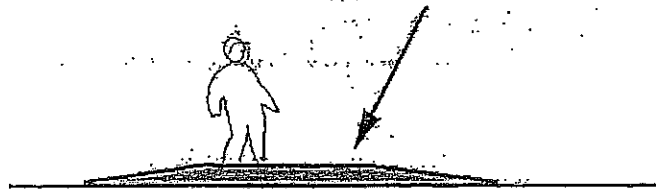

- (5) Bicycle facilities.
- A. Sites shall be designed to encourage bicycle access and connection to nearby bicycle facilities.
- B. At least 1 bicycle storage rack shall be installed for each business exceeding 50,000 square feet of floor area. Businesses shall install at least 1 bicycle rack for each 30,000 square feet of floor area. Each bicycle storage rack shall have spaces for at least 5 bicycles. When more than one business on the same parcel exceeds a combined floor area of 50,000 square feet, these standards shall apply.
- C. Bike route signs shall be installed as directed by the Planning Commission.
- D. All storm water inlet grates shall be of approved bike-safe design (example at right).

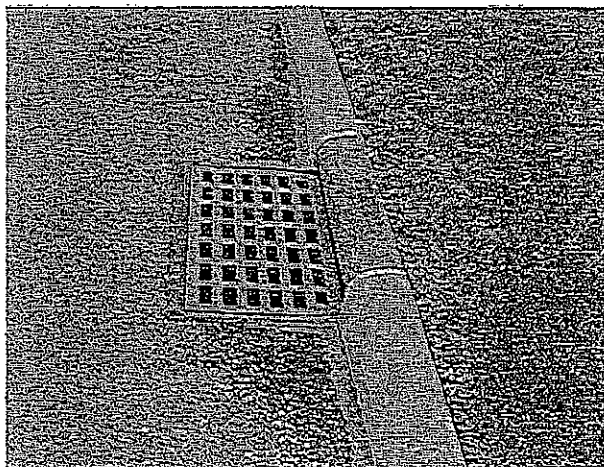

Example of bike-safe storm  
water inlet grates