


Nail a button
in 24" Ash.

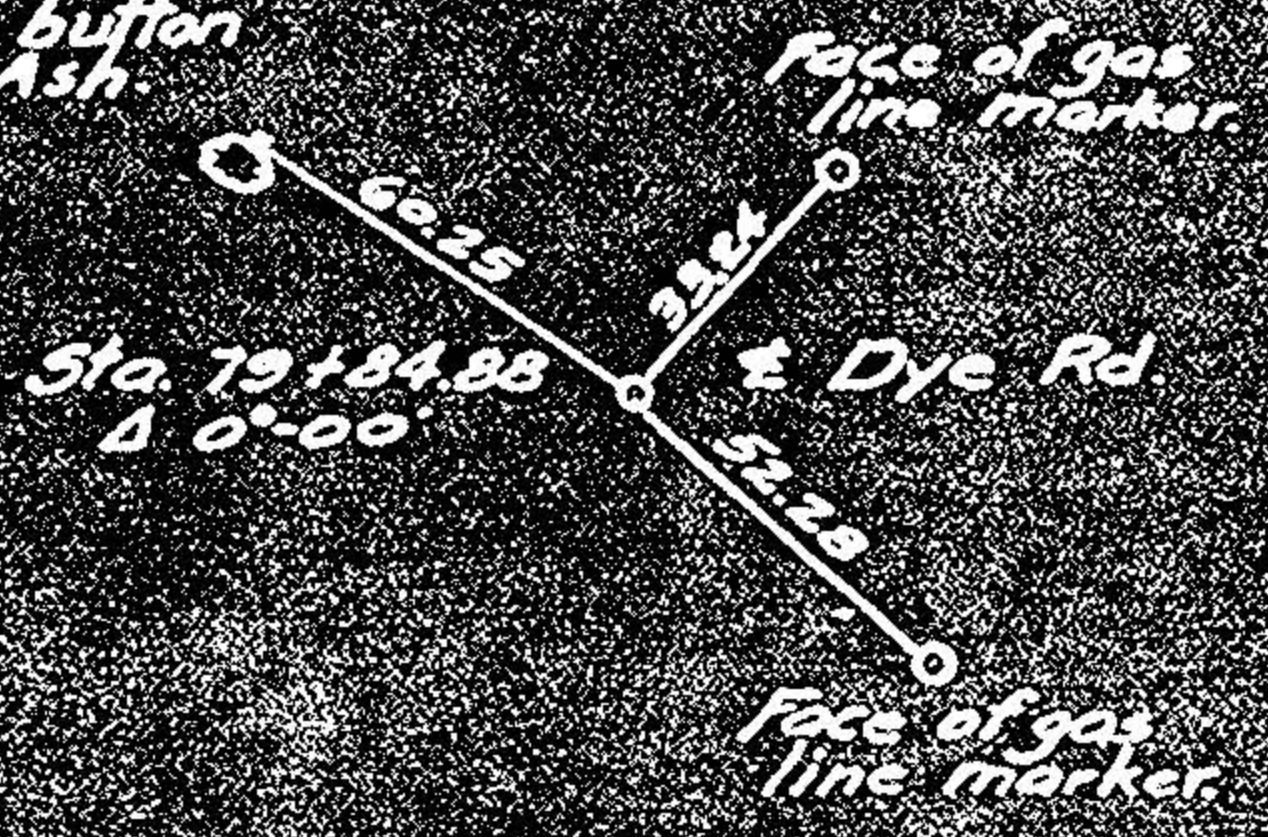

Station 81+25
 Existing Stone Slab Top Culvert.
 5.4'-0", V 2'-0", Rdwy. 22'-6"
 To be removed and replaced with
 a new Slab Top Culvert
 5.6'-0", V 2'-6", Length 47.4" by
 Lorain County.

Contractor to place 21.0 sqyds. of T-32
 on existing culvert slab.
 Quantity carried to Calculations on Sheet 40

Place 2 gal. of Bituminous Tack Coat
 Section M-5.5, MS-2 or RS-1, M-5.2, RC-1 or RC-2
 (See note in Proposal)

ISLAND RD

77 - NO-24-45'E - 78

Station 79+85 Ft.
 Existing Stone Slab Top Culvert
 5.4'-0", V 1'-6", Rdwy 20'
 To be removed and replaced with
 Std. Box Type Culvert
 5.6'-0", V 2'-0", Rdwy 31'-0"
 by Lorain County.

6 DYE ROAD
 79+84.88

Barn

Res

1-M

1-M

2-A

Gas line marker

Gas line marker

Dr+25

Dr+31

90'-22'-0"

+19

+13