37/72

CENTERLINE SURVEY PLAT
GATEWAY BLVD., BLAKE ST. & WEST RIVER RD.

095211

LORAIN CO., CITY OF ELYRIA, ELYRIA TWP., R-17-W, T-6-N
WEST OF THE RIVER

095211

03312(01)	5	OHIO	103/116

LORAIN COUNTY
CITY OF ELYRIA
WEST RIVER PKWY. PHASE 'D'
R/W PLANS

1/14

1/1

0 100 200 300 400 500
SCALE IN FEET

SIGNED Lonny G. Shippy
DATE 8-18-81 ELYRIA CITY ENGINEER

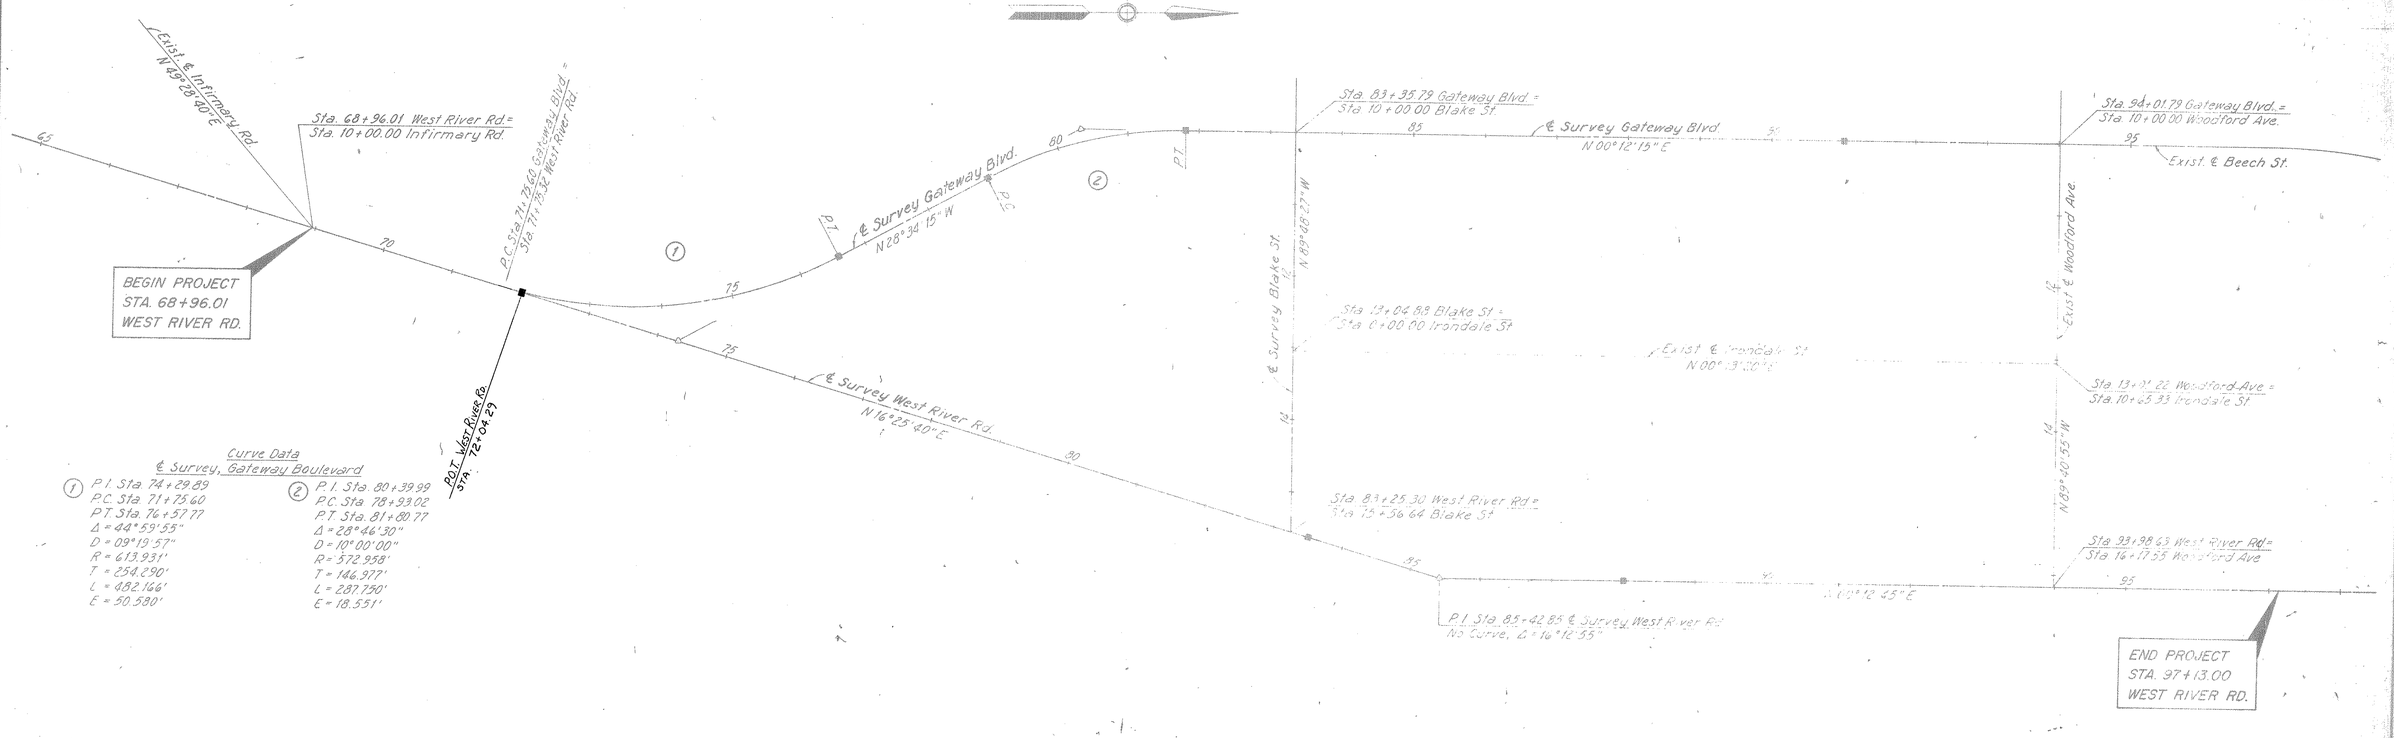

Curve Data
℄ Survey, Gateway Boulevard

①		②	
P.I. Sta. 74+29.89		P.I. Sta. 80+39.99	
P.C. Sta. 71+75.60		P.C. Sta. 78+93.02	
P.T. Sta. 76+57.77		P.T. Sta. 81+80.77	
Δ = 44°59'55"		Δ = 28°46'30"	
D = 09°19'57"		D = 10°00'00"	
R = 613.931'		R = 572.958'	
T = 254.290'		T = 146.977'	
L = 482.166'		L = 287.750'	
E = 50.580'		E = 18.551'	

■ --- DENOTES MONUMENT ASSEMBLIES AS PER STANDARD DRAWING MC-1 (REV. 6-13-69)

MONUMENT ASSEMBLIES

QUANTITY	STATION	LOCATION	REMARKS
1	Sta. 72+04.29	West River Road	P.O.T.
1	Sta. 83+50.00	West River Road	P.O.T.
1	Sta. 88+00.00	West River Road	P.O.T.
1	Sta. 76+57.77	Gateway Blvd.	P.T.
1	Sta. 78+93.02	Gateway Blvd.	P.C.
1	Sta. 81+80.77	Gateway Blvd.	P.T.
1	Sta. 91+00.00	Gateway Blvd.	P.O.T.
7	TOTAL		

NOTE:
STANDARD MONUMENT ASSEMBLIES AS LISTED HEREON ARE TO BE PLACED DURING CONSTRUCTION ON 451 PAVEMENTS AND AFTER THE LEVELING COURSE AND PRIOR TO PLACING THE SURFACE COURSES ON 404 PAVEMENTS. REFERENCE MONUMENTS ARE TO BE PLACED AFTER CONSTRUCTION IN THE VICINITY OF THE PROPOSED MONUMENTS HAS BEEN COMPLETED. ALL MONUMENTS ARE TO BE PLACED UNDER THE SUPERVISION OF A REGISTERED SURVEYOR.
ANY ALTERATIONS SHALL BE NOTED AND THE ELYRIA CITY ENGINEER SHALL BE NOTIFIED OF THE NEW LOCATION.

SWORN TO AND SUBSCRIBED BEFORE ME IN MY PRESENCE
THIS 30th DAY OF SEPTEMBER, 1981 Judith A. Sivon
NOTARY PUBLIC
MY COMMISSION EXPIRES 10-27-81

I HEREBY CERTIFY THAT THIS PLAT IS A TRUE DELINEATION OF A SURVEY MADE FOR THE CITY OF ELYRIA IN 1975 BY RICHLAND ENGINEERING, LIMITED, CONSULTING ENGINEERS.
Richard D. Keller DATE Dec 15, 1975
RICHARD D. KELLER REG. SURVEYOR NO. 5648
REVISED 9-30-81 CCS Sept 30, 1981

(SEAL)

NO TRANSFER NECESSARY
JULIAN A. PIJOR
LORAIN COUNTY AUDITOR
BY [illegible] DEPUTY 9-30-81

DELIVERED FOR RECORD OCT - 2 1981
at 1:10 o'clock P.M. in PLAT RECORD
VOL. 37 Dorothy L. Essex
PAGE 72 Lorain County Recorder

17.28 N.R.
call Craig Sampson
322-5464
self

RECEIVED ____ 197__
RECORDED ____ 197__
PLAT BOOK ____ PAGE ____
FEE PAID ____
LORAIN CO. RECORDER

PREPARED BY:
RICHLAND ENGINEERING, LTD.
CONSULTING ENGINEERS
MANSFIELD, OHIO

37/72

WEST RIVER PKWY. PHASE 'D' SHEET 1 OF 14

CENTERLINE SURVEY PLAT