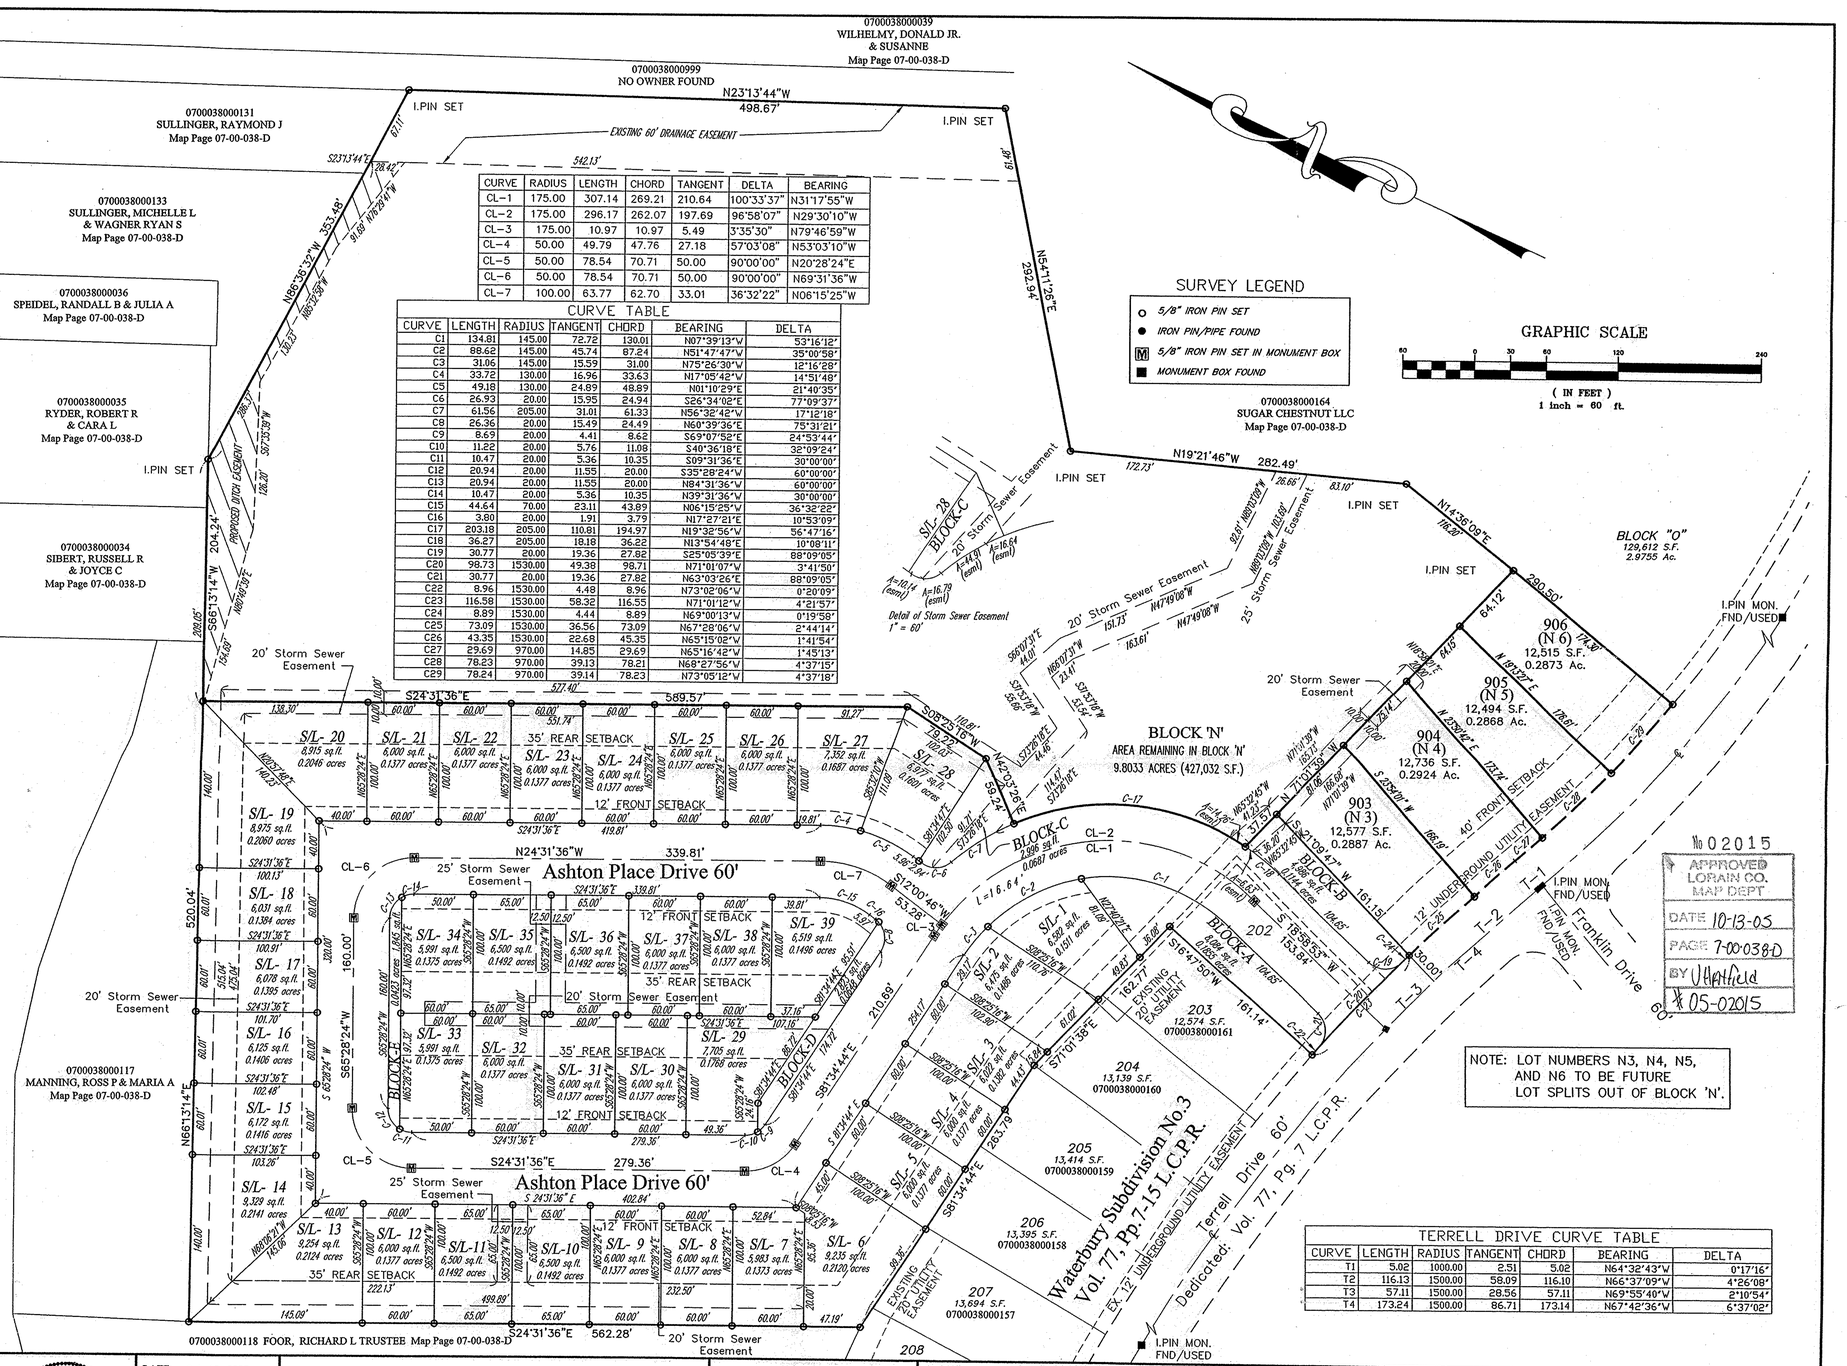

CURVE	RADIUS	LENGTH	CHORD	TANGENT	DELTA	BEARING
CL-1	175.00	307.14	269.21	210.64	100°33'37"	N31°17'55"W
CL-2	175.00	296.17	262.07	197.69	96°58'07"	N29°30'10"W
CL-3	175.00	10.97	10.97	5.49	3°35'30"	N79°46'59"W
CL-4	50.00	49.79	47.76	27.18	57°03'08"	N53°03'10"W
CL-5	50.00	78.54	70.71	50.00	90°00'00"	N20°28'24"E
CL-6	50.00	78.54	70.71	50.00	90°00'00"	N69°31'36"W
CL-7	100.00	63.77	62.70	33.01	36°32'22"	N06°15'25"W

CURVE TABLE

CURVE	LENGTH	RADIUS	TANGENT	CHORD	BEARING	DELTA
C1	134.81	145.00	72.72	130.01	N07°39'13"W	53°16'12"
C2	88.62	145.00	45.74	87.24	N51°47'47"W	35°00'58"
C3	31.06	145.00	15.59	31.00	N75°26'30"W	12°16'28"
C4	33.72	130.00	16.96	33.63	N17°05'42"W	14°51'48"
C5	49.18	130.00	24.89	48.89	N01°10'29"E	21°40'35"
C6	26.93	20.00	15.95	24.94	S26°34'02"E	77°09'37"
C7	61.56	205.00	31.01	61.33	N56°32'42"W	17°12'18"
C8	26.36	20.00	15.49	24.49	N60°39'36"E	75°31'21"
C9	8.69	20.00	4.41	8.62	S69°07'52"E	24°53'44"
C10	11.22	20.00	5.76	11.08	S40°36'18"E	32°09'24"
C11	10.47	20.00	5.36	10.35	S09°31'36"E	30°00'00"
C12	20.94	20.00	11.55	20.00	S35°28'24"W	60°00'00"
C13	20.94	20.00	11.55	20.00	N84°31'36"W	60°00'00"
C14	10.47	20.00	5.36	10.35	N39°31'36"W	30°00'00"
C15	44.64	70.00	23.11	43.89	N06°15'25"W	36°32'22"
C16	3.80	20.00	1.91	3.79	N17°27'21"E	10°53'09"
C17	203.18	205.00	110.81	194.97	N19°32'56"W	56°47'16"
C18	36.27	205.00	18.18	36.22	N13°54'48"E	10°08'11"
C19	30.77	20.00	19.36	27.82	S25°05'39"E	88°09'05"
C20	98.73	1530.00	49.38	98.71	N71°01'07"W	3°41'50"
C21	30.77	20.00	19.36	27.82	N63°03'26"E	88°09'05"
C22	8.96	1530.00	4.48	8.96	N73°02'06"W	0°20'09"
C23	116.58	1530.00	58.32	116.55	N71°01'12"W	4°21'57"
C24	8.89	1530.00	4.44	8.89	N69°00'13"W	0°19'58"
C25	73.09	1530.00	36.56	73.09	N67°28'06"W	2°44'14"
C26	43.35	1530.00	22.68	45.35	N65°15'02"W	1°41'54"
C27	29.69	970.00	14.85	29.69	N65°16'42"W	1°45'13"
C28	78.23	970.00	39.13	78.21	N68°27'56"W	4°37'15"
C29	78.24	970.00	39.14	78.23	N73°05'12"W	4°37'18"

TERRELL DRIVE CURVE TABLE

CURVE	LENGTH	RADIUS	TANGENT	CHORD	BEARING	DELTA
T1	5.02	1000.00	2.51	5.02	N64°32'43"W	0°17'16"
T2	116.13	1500.00	58.09	116.10	N66°37'09"W	4°26'08"
T3	57.11	1500.00	28.56	57.11	N69°55'40"W	2°10'54"
T4	173.24	1500.00	86.71	173.14	N67°42'36"W	6°37'02"

REV. No.		DATE	BY	CH'K'D

STATE OF OHIO
DANIEL LAUX
S-7087
REGISTERED
PROFESSIONAL SURVEYOR

DATE: Oct. 12, 2005
SCALE: HOR. 1"=60'-0"
VERT.
FILENAME: LOT SPLITS
TAB: Lot Split
CREW CHIEF:

BLOCK "N" REMAINDER

CITY OF NORTH RIDGEVILLE – LORAIN COUNTY – OHIO

polaris Engineering & Surveying

POLARIS ENGINEERING & SURVEYING, INC.
34600 CHARDON ROAD – SUITE D
WILLOUGHBY HILLS, OHIO 44094
(440) 944-4433 (440) 944-3722 (Fax)
www.polaris-es.com

LOT SPLITS LOTS 903, 904, 905, 906

CONTRACT No. 04631

SHEET 2 OF 2